



COLLECTION CATALOG





CONTENTS

04 ABOUT US

06 OLIVLUXE

08 OLIVDIAMOND

10 OLIVPLATINUM

12 OLIVSILVER



Over A Decade Of Composite

Good flooring is the foundation for a successful project. We know you need a quality floor that will compliment your vision and satisfy your taste. Olivium has been helping clients realize their dream flooring options by providing quality flooring and exceptional service.



Some colors and designs may vary. We recommend that consumers visit oasiseverlasting.com or view a room scene to see the exact color.



RAIL OAK



FALCON OAK



GREBES OAK



IBIS OAK



LOONS OAK



PIPITS OAK



SHRIKE OAK



SWALLOW OAK



TERNS OAK



THRUSH OAK



OLIVLUXE TRADITIONAL INSPIRATION

Classic and contemporary, this collection is available in a range of traditional colors and styles that withstand the test of time.

DIMENSIONS:

- Width: 7"
- Length: 48"
- 20 mil (0.5 mm) Wear Layer
- Thickness less underlayment - 4.3mm
- Thickness with underlayment - 5.3mm
- UV Protective Coating

JOINT LOCKING:

- Click Lock
- 5G-I System

SURFACE EDGING:

- Square Edge

SURFACE TEXTURE:

- Real Wood Texture

GRADE LEVEL:

- Above Grade
- On Grade
- Below Grade

METHOD:

- Floating

SPC CONSTRUCTION:

- Higher Stability & Density
- Lower Expansion / Contraction
- Can be installed over radiant floor heating system
- 100% Waterproof

PERFORMANCE:

- Carb II compliant
- Sound Transmission Class:
- STC = 65 IIC = 69



TITAN OAK




RAVEN OAK



NUTMEG OAK



SILVER CREEK OAK

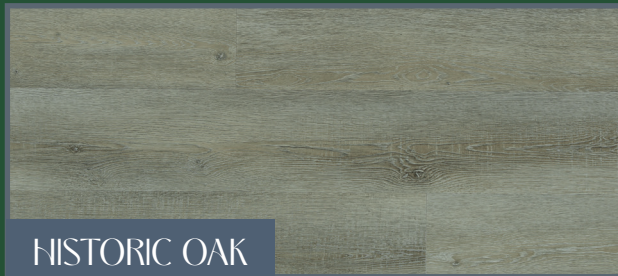

HISTORIC OAK



CHAI OAK



DEL MAR OAK



TOFFEE OAK



BALBOA OAK



LAGUNA OAK



OWL OAK



FINCH TEAK



OLIVDIAMOND CUSTOMER INSPIRATION

Available to you in a diverse range of fresh colors, these interlocking floor tiles will provide you with long-lasting comfort.

DIMENSIONS:

- Width: 7"
- Length: 48"
- 20 mil (0.5 mm) Wear Layer
- Thickness less underlayment - 4.3mm
- Thickness with underlayment - 5.3mm
- UV Protective Coating

JOINT LOCKING:

- Click Lock
- 5G-I System

SURFACE EDGING:

- Square Edge

SURFACE TEXTURE:

- Real Wood Texture

GRADE LEVEL:

- Above Grade
- On Grade
- Below Grade

METHOD:


- Floating

SPC CONSTRUCTION:

- Higher Stability & Density
- Lower Expansion / Contraction
- Can be installed over radiant floor heating system
- 100% Waterproof

PERFORMANCE:

- Carb II compliant
- Sound Transmission Class: STC = 65 IIC = 69

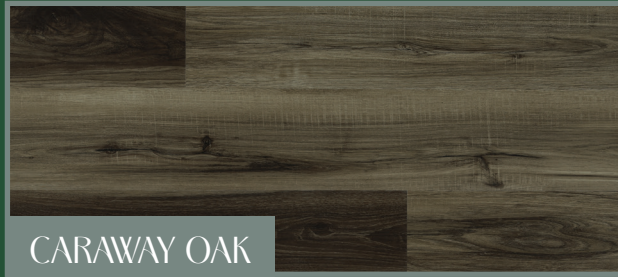

CARAWAY OAK



ANGELICA OAK



SAFRON OAK



SUMAC OAK



KAFFIR OAK



CLOVE OAK



ROSEMARY OAK



ANNATTO OAK



ANISE OAK



CHERVIL OAK



OLIVPLATINUM EUROPEAN INSPIRATION

Sleek and modern, with an emphasis on minimalist coloring, this collection is inspired by European designs and influences.

DIMENSIONS:

- Width: 7"
- Length: 48"
- 20 mil (0.56 mm) Wear Layer
- Thickness less underlayment - 4.3mm
- Thickness with underlayment - 5.3mm
- Double UV Finish

JOINT LOCKING:

- Click Lock
- Unilin System

SURFACE EDGING:

- Beveled Edge

SURFACE TEXTURE:

- Real Wood Texture

GRADE LEVEL:

- Above Grade
- On Grade
- Below Grade

METHOD:

- Floating

SPC CONSTRUCTION:

- Higher Stability & Density
- Lower Expansion / Contraction
- Can be installed over radiant floor heating system
- 100% Waterproof

PERFORMANCE:

- Sound Transmission Class:
- STC = 63 IIC = 65



CASPER OAK



CRIMSON OAK



SPIKE OAK



FINLEY OAK



DRAKE OAK



MARLIN OAK



DEXTER OAK



CHIVE OAK



FENNEL OAK



OLIVSILVER SIMPLE INSPIRATION

This innovative collection uses a glue down installation method;
making style more economical than ever.

GLUE DOWN 2.5MM X 7¼" X 48" - 20MIL

COLOR:

Oak Visual

INSTALLATION METHOD:

Glue Down

PLANK SIZE

7" X 48"

WARRANTY

30 Res / 10 Comm

BACKER

None/Dryback

WEAR LAYER

20 Mil Deep Embossed

SUITABILITY

Wet Areas

EDGE TYPE

Square Edge

FINISH

Double UV Finish

GRADE

Commercial



866.627.4766 | info@oliviumfloors.com
www.oliviumfloors.com